


CIRCULATION FANS

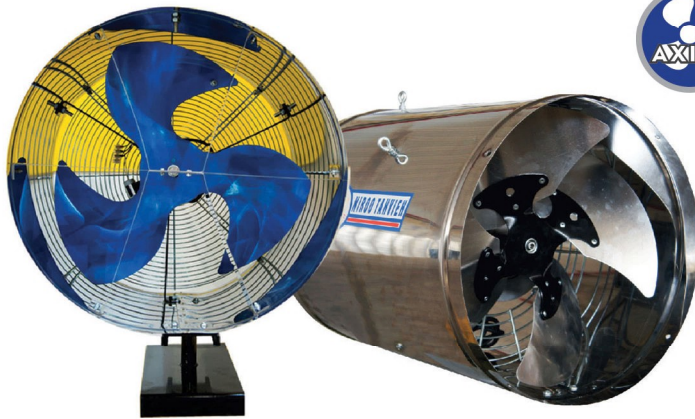

Application

- Industrial Halls
- Residential Building
- Business Centers
- Sport Halls

| Model | AirFlow m ³ /h | Electro Motor | | | | | | |
|--------|---------------------------|---------------|-----|---------|----|-----|------|----|
| | | HP | W | Voltage | Hz | Amp | RPM | IP |
| NTA447 | 6000 | 0.5 | 370 | 220 | 50 | 2.5 | 1440 | 54 |
| NTA657 | 7000 | 0.75 | 550 | 220 | 50 | 3.2 | 1440 | 54 |
| NTA457 | 8000 | 1.00 | 750 | 220 | 50 | 3.5 | 1440 | 54 |
| NTA363 | 10000 | 0.75 | 550 | 220 | 50 | 2.3 | 950 | 54 |

| Model | Blade | NO.Of Blade | Diameter(cm) | Weight (kg) |
|--------|------------|-------------|--------------|-------------|
| NTA447 | Aluminum | 4 | 47 | 21 |
| NTA657 | Galvanized | 6 | 57 | 24 |
| NTA457 | Aluminum | 4 | 57 | 22.5 |
| NTA363 | PAG | 3 | 63 | 21 |

Benefits and Features

- Frame made of high strength stainless steel sheet
- Safety wire guard motor side
- High airflow and high efficiency
- Low power consumption, results in lower energy cost
- Direct drive system
- Improves indoor air quality by preventing air stratification and condensation
- Fast and easy installation
- Air Throw distance, 20-40m (different models)

